

DIGITAL LOAD INDICATOR

Self contained unit with rechargeable battery suitable for use in the field where power is not available

Multiple auto ranging

Peak Hold Function

Automatic data logging and computer interface available optional

External power supply provided for battery charging or for operation from mains supply

Force Unit Selection between KG, Newton and Pounds

Various capacities available range from 2 Kg to 50 tonnes



Capacity	Multi Ranging resolution (Auto range)			
10 kg	0 - 0.5 kg 0.1 gms	0.5- 1 kg 0.2 gms	1- 5kg 1 gms	5 - 10kg 2 gms
20 kg	0 - 1 kg 0.2 gms	1 - 2kg 0.4 gms	2-10kg 2 gms	10 - 20kg 4 gms
50 kg		0 - 5 kg 1 gms	5 -25kg 5 gms	25 -50kg 10 gms
100 kg	0 - 5kg 1 gms	5 - 10kg 2 gms	10- 50kg 10 gms	50 - 100kg 20 gms
200 kg	0 - 10 kg 2gms	10- 20 kg 4 gms	20-100kg 20 gms	100-200kg 40 gms
1000 kg	0 - 50 kg 10 gms	50-100kg 20 gms	100-500kg 100gms	500-1000kg 200gms
2000 kg	0 - 100 kg 20 gms	100-200kg 40 gms	200-1000kg 200gms	1000-2000kg 400gms
5000 kg		0-500kg 100 gms	500-2500kg 500 gms	2500-5000kg 1kg
10000 kg	0 - 500kg 100 gms	500-1000kg 200gms	1000-5000kg 1kg	5000-10.000kg 2kg



SIMPLETECH INSTRUMENTS


Fact/Office Entrance : No.76, Jagadhish Building, Vidhyaranyapura Main Road, Doddabommasandra, Bangalore -560097, India.

Telefax : +91 80 28382561 Phone: +91 80 65672036

E-mail : marketing@simpletechindia.com

Website : www.simpletechindia.com

DIGITAL LOAD INDICATOR

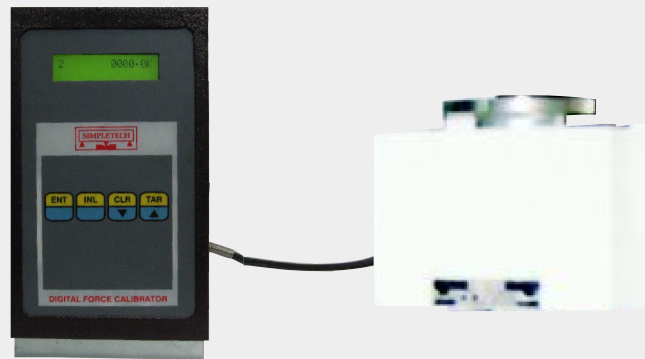

MODEL : DFC300T

Capacity - 300 Tons

Resolution - 20 Kgs

Peak Hold Function

Force Unit Selection between KG, Newton and Pounds

Seperate Loadcell and Display Units

AC Power Supply - 220V, 50Hz



SIMPLETECH INSTRUMENTS

Fact/Office Entrance : No.76, Jagadhish Building,
Vidhyaranyapura Main Road, Doddabommasandra,
Bangalore -560097, India.

Telefax : +91 80 28382561 Phone: +91 80 65672036

E-mail : marketing@simpletechindia.com

Website : www.simpletechindia.com